

# etolmax 812

Dosing device for liquid detergents, conductive control device for automatic dosing of etolit detergents

## Device description

- > Dosing device with conductivity control for automatic input of liquid cleaners
- > Self-priming hose pump with spring-loaded rotor rollers and snap-on lid for easy and fast pump hose change
- > Empty display for the cleaner container by means of suction gloss or conductivity
- > optionally for internal can also be connected to an external empty display
- > 3 LEDs (display standby: LED 1 green continuous light, dosing: LED 2 green flashing, deficiency/fault: LED 3 red continuous light )

## Delivery/ Connection material

- 1 Dosing device
- 4 m Cable 4 x 1,0 mm<sup>2</sup>
- 1 Ind. Conductivity sensor
- 1 Alkaliean introduction 90°
- 10 m Norprene-Hose natur ID 6 x AD 12
- 1 Foot valve 12mm
- 1 Hose holder 4.8x6 mm saffron
- 1 Clamps
- 1 Wall mounting material

## Technical data

- > Voltage..... 230 V, 50 Hz, 16 VA
- > Protection class.....IP 65
- > Dosing area..... 55-4000 ml/h
- > Dosing time monitoring.....With suction-lance, 6 sec – 20 min
- > Pressure..... Max. 2 bar
- > Suction height.....Max. 1,7m
- > Dimensions..... 92 x 170 x 130 mm

## Application




## Product image



# etolmax 812

## Electrical connection sketch

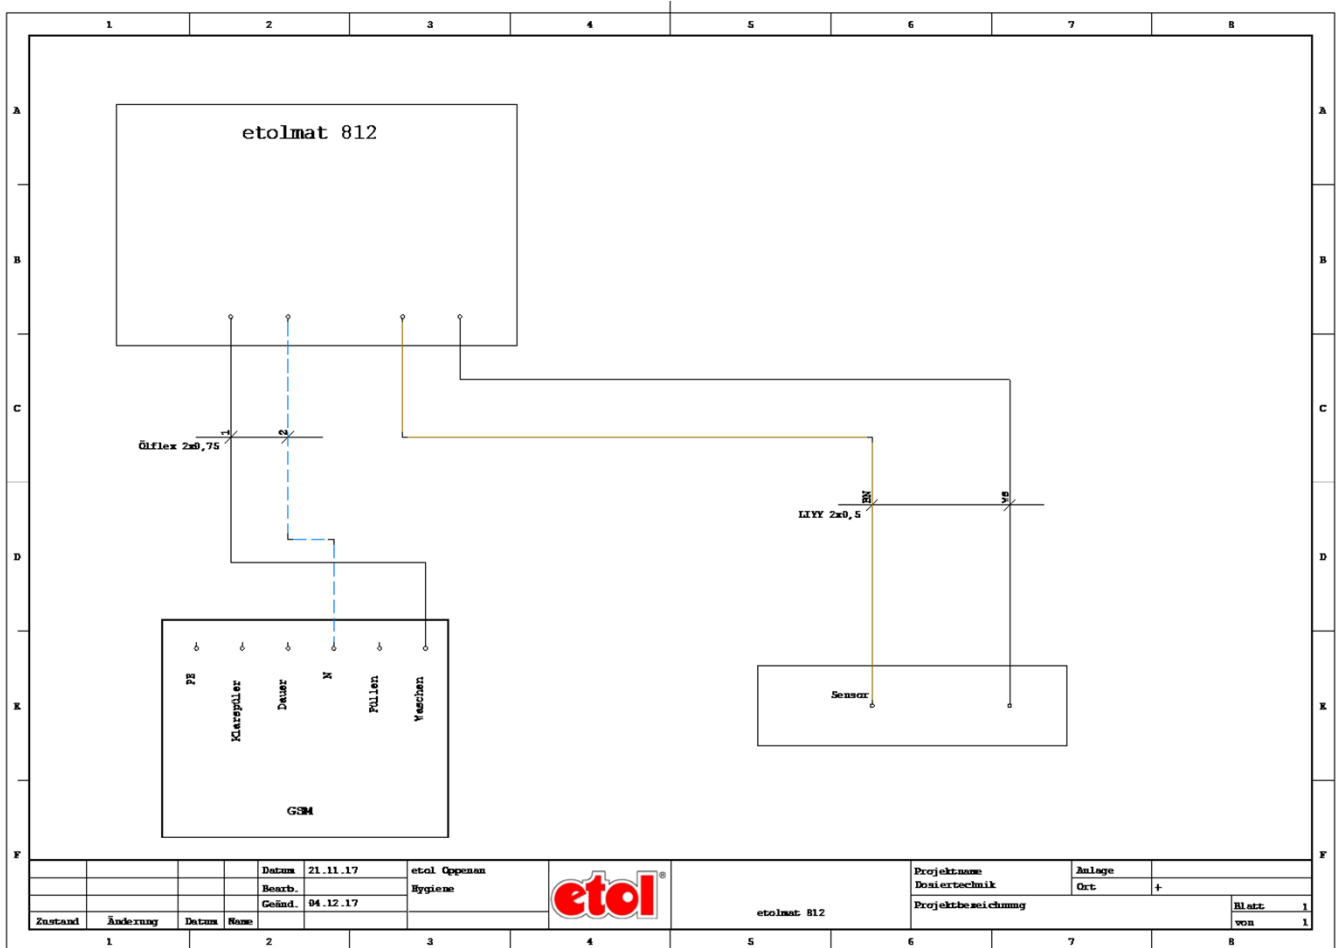

# etolmax 812

## Spare parts

<u>Article</u>	<u>Description</u>
2000745	Hose holder 4.8x6 mm saffron (for glass fiber reinforced cleaner hose)
2000742	Norprene hose ID 6 x AD 12 (glass fiber reinforced hose for cleaner)
2002217	Foot valve 12mm
2002247	Alkaliean entry 90° stainless steel
2003157	Pump casings cover etolmax KSS/812 NEW
2003165	Pump hose DPSN 136-4,8*2,4 Ph Etolmax812
2003163	Rotor cover 9911 saffron
2003175	Inductive electrode ILFS02 etolmax 812