

# etolmat KSS

Dosing device for liquid rinse aid, speed-controlled device for automatic dosing of etolit rinse aid

## Device description

- > Dosing hose pump with microprocessor-controlled drive for automatic input of liquid rinses
- > Self-priming hose pump with spring-loaded rotor rollers and snap-on lid for easy and fast pump hose change
- > Robust, space-saving dosing device

## Delivery/ Connection material

- 1 Dosing device
- 4 m Connection cable 4 x 1.0 mm<sup>2</sup>
- 1 Non return valve stainless steel 6 mm 1/8" with hose adapter and O-ring seal
- 6 m Glass fiber reinforced silicone hose blue ID 6 x AD 12
- 1 Foot valve 12mm
- 1 Hose holder PP KSS 6x3 mm blue
- 1 Hose clamp
- 1 Wall mount material


## Technical data

- > Voltage..... 230 V, 50 Hz, 16 VA
- > Protection class.....IP 65
- > Dosing area..... 55 - 4000 ml/h
- > Pressure..... Max. 2 bar
- > Suction height.....Max.1,7m
- > Dimensions..... 92 x 170 x 130 mm

## Application




## Product image

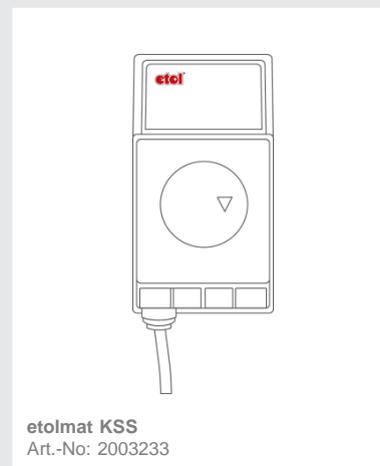

# etolmat KSS

Electrical connection sketch

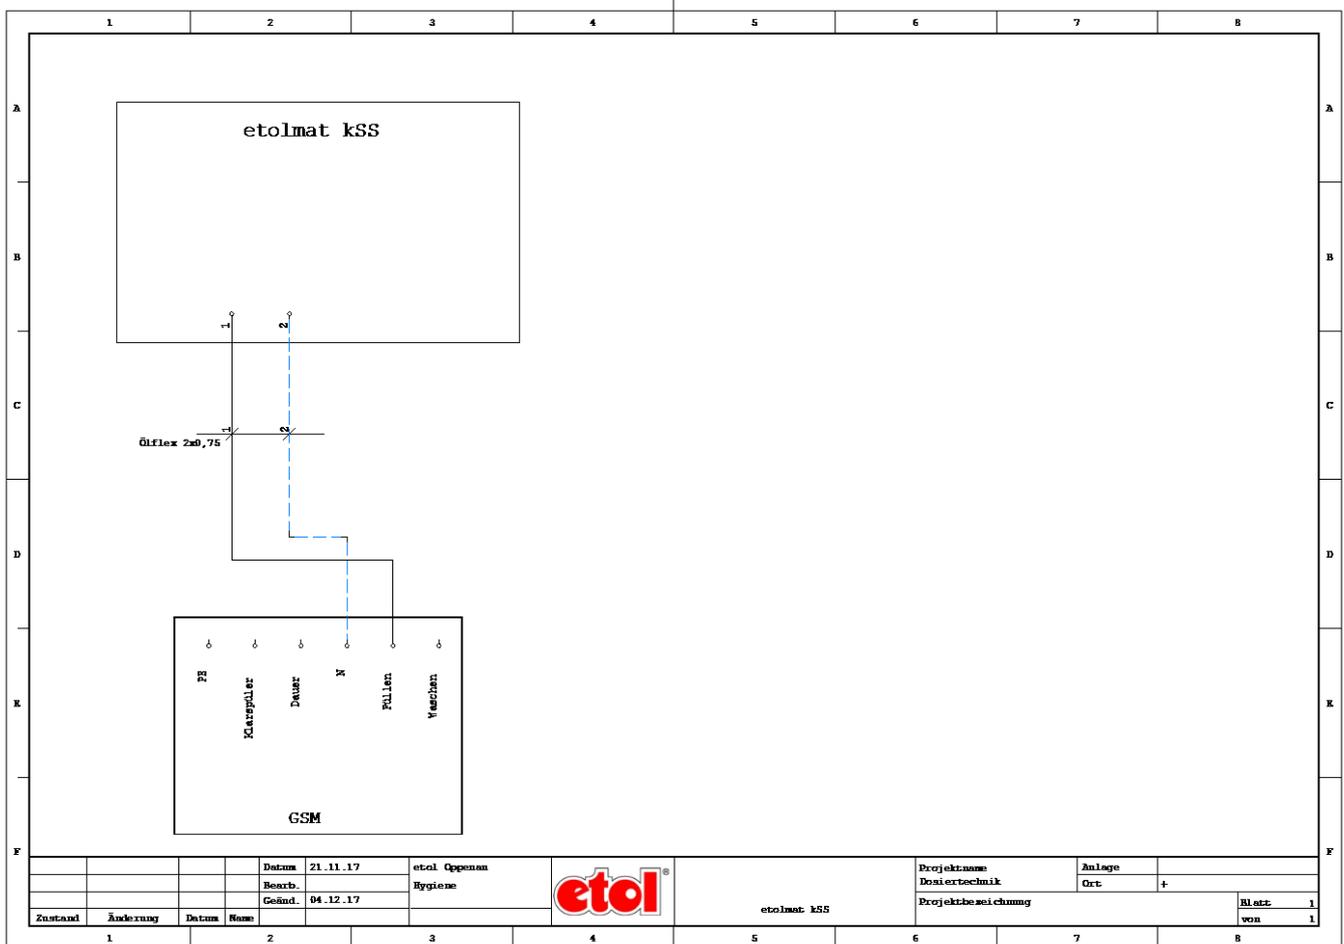

Datum		21.11.17		etol Oppenau		Projektname		Anlage	
Besrb.		Hygiene				Dostertechnik		Ort	
Geänd.		04.12.17		etolmat kss		Projektbezeichnung		Blatt	
Zustand		Änderung		Datum		Name		von	
1		2		3		4		8	
								1	
								1	

# etolmat KSS

## Spare parts

<u>Article</u>	<u>description</u>
2000738	Non return valve stainless steel 6 mm, 1/8" (for glass fiber reinforced clear rinse hose )
2000740	Hose holder PP KSS 6x3 mm blue (for glass fiber reinforced rinse hose )
2000741	Silicone hose blue ID 6 x AD 12 (glass fiber reinforced hose for clear-water cleaner)
2002217	Foot valve 12mm
2003152	Rotor cover 9911 blue
2003178	Pump hose PS 138- x1.6*1.6 Ri4 Etolmax KSS, Etolmat KSS
2003176	Pump hose SET PS 138- x1.6*1.6 Ri4 etolmax KSS, etolmat KSS